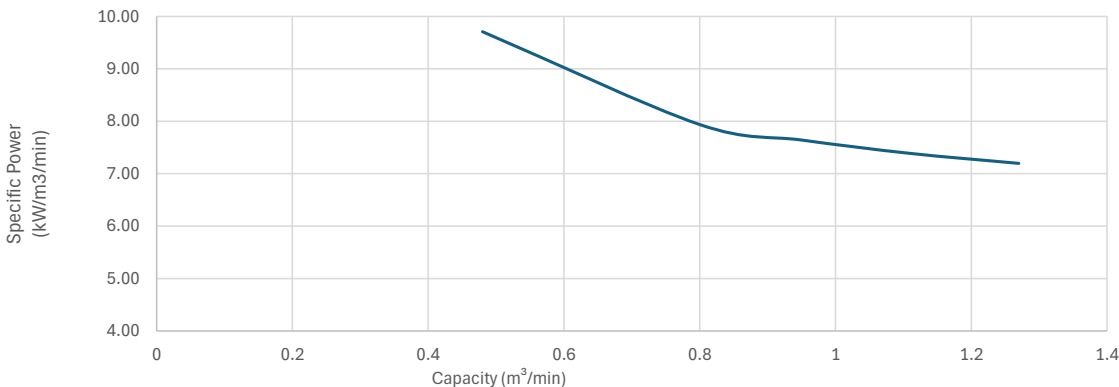


MODEL DATA - FOR COMPRESSED AIR					
1	Manufacturer:	Gardner Denver			
2	Model No:	VS7e	Date:	01.08.2024	
	X	Air Cooled	Type:	Regulated Speed	
		Water Cooled	# of Stages:	1	
		Other Please State:			
3	Full Load Operating Pressure	7	bar g		
4	Drive Motor Nominal Rating	7.5	kW		
5	Drive Motor Nominal Efficiency	90.1	% (percent)		
6	Fan Motor Nominal Rating (if applicable)	n/a	kW		
7	Fan Motor Nominal Efficiency	n/a	% (percent)		
8	Range	Input Power (kW)	Capacity (m ³ /min)	Specific Power (kW/m ³ /min)	Isentropic Efficiency (%)
		Maximum Speed 100%	9.14	1.27	7.20
		8.20	1.11	7.39	64.07%
		7.26	0.95	7.64	61.93%
		6.35	0.80	7.94	59.63%
	Minimum Speed	4.66	0.48	9.71	48.75%
9	Total Package Input Power at Zero Flow	1.3	kW		
10	 Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 4 to 10, + 1kW/m³/min increments X-Axis Scale, 0 to 25% over maximum capacity				

*For models that are tested in the BCAS Data Sheet & Verification Programme, these items are verified by the third party administrator. Consult BCAS website for a list of participants in the third party verification programme: www.bcas.org.uk

Notes:

- Measured at the discharge terminal point of the compressor in accordance with ISO1217, Annex E; m³/min is cubic metres per minute at inlet conditions.
- The operating pressure at which the capacity (item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- No Load Power in accordance with ISO1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in ISO1217, Annex E, as shown in table below:
- The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions	Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m ³ /min	%	%	%
Below 0.5	+/- 7	+/- 8	+/- 10
0.5 to 1.5	+/- 6	+/- 7	
1.5 to 15	+/- 5	+/- 6	
Above 15	+/- 4	+/- 5	