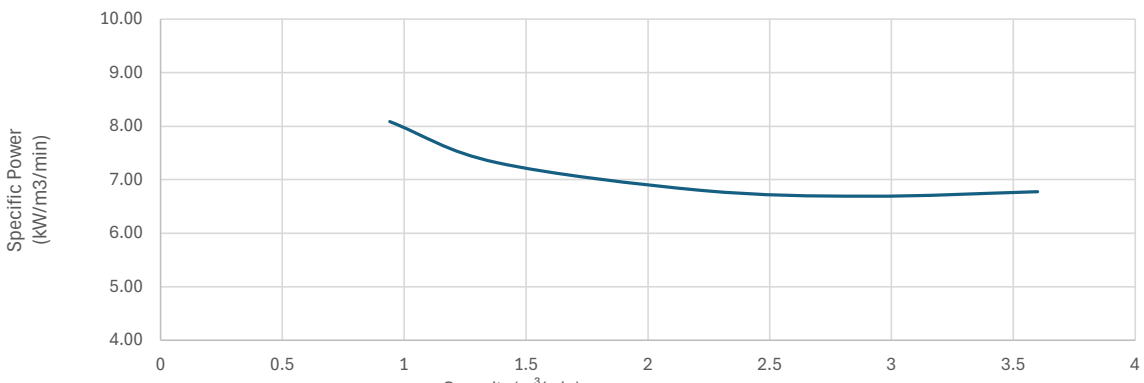


ROTARY COMPRESSOR: VARIABLE SPEED / FREQUENCY DRIVE

MODEL DATA - FOR COMPRESSED AIR					
1	Manufacturer: HPC - KAESER COMPRESSORS				
2	Model No:	ASK34SFC - 8barg		Date:	31.07.2025
	X	Air Cooled		Type:	Screw
		Water Cooled		# of Stages:	1
		Other	Please State:		
3	Full Load Operating Pressure		7.5	bar g	
4	Drive Motor Nominal Rating		18.5	kW	
5	Drive Motor Nominal Efficiency		92.4	% (percent)	
6	Fan Motor Nominal Rating (if applicable)		0.55	kW	
7	Fan Motor Nominal Efficiency		74	% (percent)	
8	Range	Input Power (kW)	Capacity (m ³ /min)	Specific Power (kW/m ³ /min)	Isentropic Efficiency (%)
	Maximum Speed 100%	24.40	3.6	6.78	72.56%
		19.40	2.9	6.69	73.51%
		15.10	2.22	6.80	72.30%
		10.10	1.38	7.32	67.19%
	Minimum Speed	7.60	0.94	8.09	60.82%
9	Total Package Input Power at Zero Flow		2.6	kW	
10	 Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 4 to 10, + 1kW/m³/min increments X-Axis Scale, 0 to 25% over maximum capacity				

*For models that are tested in the BCAS Data Sheet & Verification Programme, these items are verified by the third party administrator. Consult BCAS website for a list of participants in the third party verification programme: www.bcas.org.uk

Notes:

- a. Measured at the discharge terminal point of the compressor in accordance with ISO1217, Annex E; m³/min is cubic metres per minute at inlet conditions.
- b. The operating pressure at which the capacity (item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- c. No Load Power in accordance with ISO1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO1217, Annex E, as shown in table below:
- e. The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions	Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m ³ /min	%	%	%
Below 0.5	+/- 7	+/- 8	+/- 10
0.5 to 1.5	+/- 6	+/- 7	
1.5 to 15	+/- 5	+/- 6	
Above 15	+/- 4	+/- 5	